

LIGHT
LIFE
LIFE





THERE'S R&D. AND THEN THERE'S LUMCA R&D.

With an innovation-driven culture and commitment to high performance, we ensure that the quality of our products surpasses industry standards. From our designs to the materials we use to our manufacturing processes, Lumca provides crave-worthy lighting products for large-scale projects and prestigious clients in North and Central America.

The future of outdoor lighting
comes from the inside.

Meet Lumca's first Urban-Cozy light, LIO. Sleek and stylish, its design pays tribute to the lights that transform our homes into oases. With LIO, the high-quality and aesthetic narrative of interior light fixtures is now brought to public spaces—with the performance and robustness operators require.



Outdoor lighting never
had this much quality.

UP TO 15 000 LUMENS LIO-L (LARGE)
UP TO 125 LUMENS / WATT
DISTRIBUTIONS: I,II,III,IV,V
CCT: 3000K AND 4000K
CRI: 70-80
DARK SKY COMPLIANT
CSA
IP66



LIO-L
LF9 CF80 36

OPTIONS

HSS
HOUSE SIDE SHIELD (INTERNAL)

BTP
BUTTON TYPE PHOTOCELL

PER
TWIST LOCK PHOTOCELL
RECEPTACLE (ANSI C136.41)

RCD-DOF
INTERNAL DIMONOFF LIGHT CONTROL SYSTEM
C/W ANTENNA (SOFTWARE NOT INCLUDED)

TRP7
7 PINS TWIST LOCK PHOTOCELL RECEPTACLE
(ANSI C136.41) C/W SHORTING CAP

TRP
7 PINS TWIST LOCK PHOTOCELL RECEPTACLE
(ANSI C136.41) C/W PHOTOCELL






AVAILABLE DIMENSION OPTIONS

LIO-S (SMALL)
UP TO 10 000 LUMENS

LIO-M (MEDIUM)
UP TO 15 000 LUMENS

LIO-L (LARGE)
UP TO 15 000 LUMENS

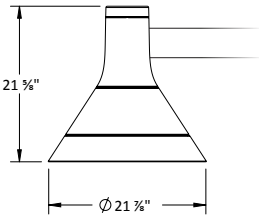



COSMO

PR8475
(4 ARMS)

PR8275
(2 ARMS)

Say hello to Cosmo,
a revamped take
on a popular classic
in urban lighting.

Cosmo pays tribute to lanterns of by-gone
eras with a modern twist. Add elegance
and prestige to any city landscape.

UP TO 20 000 LUMENS
UP TO 110 LUMENS / WATT
DISTRIBUTIONS: I,II,III,IV,V
CCT: 3000K AND 4000K
CRI: 70-80
DARK SKY COMPLIANT
IP66
CSA

OPTIONS

HSS
HOUSE SIDE SHIELD (INTERNAL)

BTP
BUTTON TYPE PHOTOCELL

PER
TWIST LOCK PHOTOCELL RECEPTACLE (ANSI C136.41)

RCD-DOF
INTERNAL DIMONOFF LIGHT CONTROL SYSTEM
C/W ANTENNA (SOFTWARE NOT INCLUDED)

TRP7
7 PINS TWIST LOCK PHOTOCELL RECEPTACLE
(ANSI C136.41) C/W SHORTING CAP

TRP
7 PINS TWIST LOCK PHOTOCELL RECEPTACLE
(ANSI C136.41) C/W PHOTOCELL

CITII

Never compromise
on city style.

—

Meet Citii, a sleek new line of LED lights
that blend in harmoniously in any
contemporary urban design. A touch
of muted luxury that goes a long way.



PR8476
(4 ARMS)



PR8276
(2 ARMS)

UP TO 20 000 LUMENS
UP TO 110 LUMENS / WATT
DISTRIBUTIONS: I,II,III,IV,V
CCT: 3000K AND 4000K
CRI: 70-80
DARK SKY COMPLIANT
IP66
CSA

OPTIONS
HSS
HOUSE SIDE SHIELD (INTERNAL)

BTP
BUTTON TYPE PHOTOCELL

PER
TWIST LOCK PHOTOCELL
RECEPTACLE (ANSI C136.41)

RCD-DOF
INTERNAL DIMONOFF LIGHT CONTROL SYSTEM
C/W ANTENNA (SOFTWARE NOT INCLUDED)

TRP7
7 PINS TWIST LOCK PHOTOCELL RECEPTACLE
(ANSI C136.41) C/W SHORTING CAP

TRP
7 PINS TWIST LOCK PHOTOCELL RECEPTACLE
(ANSI C136.41) C/W PHOTOCELL

NON-LUMINOUS

Silver

RA-S

Black

RA-B

Orange

RA-O

Red

RA-R

COLOR ACCENTS




WB24-4



WB24-5

Bases

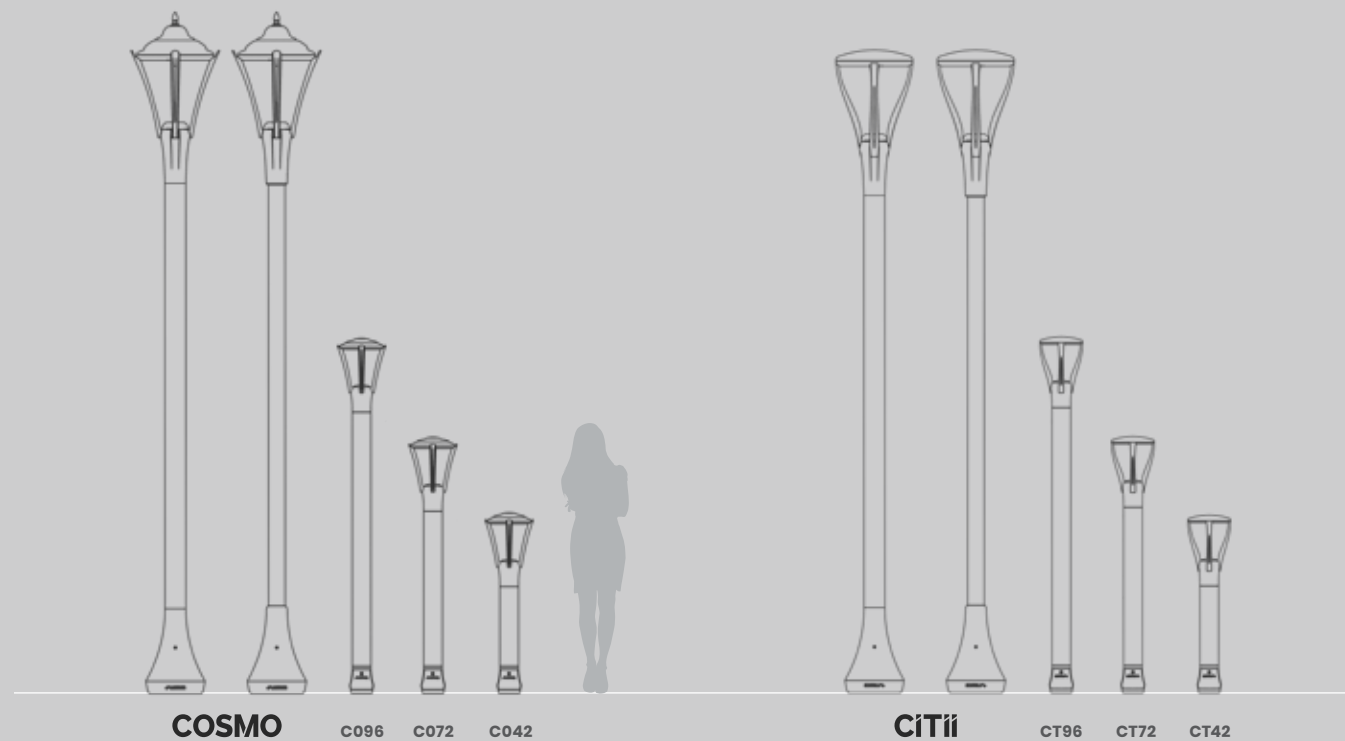

COSMO

C096

C072

C042

Citi

CT96

CT72

CT42

AESTHETIC POLES AND BASES

Bollards

UP TO 4 000 LUMENS
UP TO 100 LUMENS / WATT
DISTRIBUTIONS: I,II,III,IV,V
VOLTAGE: 120, 208, 240, 277, 347, 480
WATTAGE LED: 20-40W
DARK SKY COMPLIANT
IP66

OPTIONS

HSS
HOUSE SIDE SHIELD (INTERNAL)

BTP
BUTTON TYPE PHOTOCELL



CO42

CT42




AURA

Aura: Outdoor LED
lighting that masters
each moment.

Aura is a new generation of outdoor lighting solutions for cities that defies convention. Imagine being able to take advantage of the design flexibility, energy savings and lifespan of LED lights—all while offering the warm ambience of traditional lighting. That is the breakthrough with AURA. Never compromise on look—or performance.



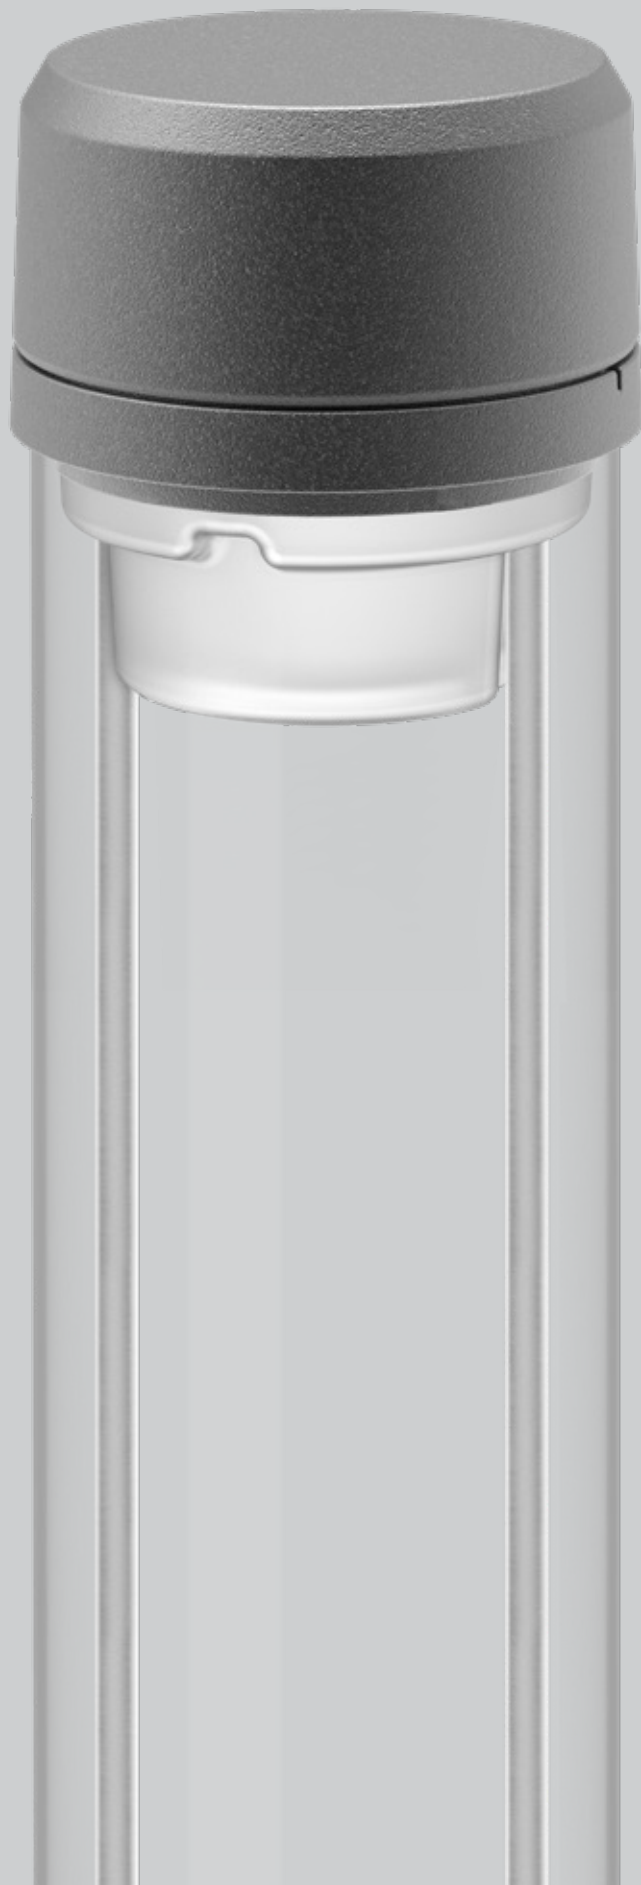

UP TO 10 000 LUMENS
UP TO 110 LUMENS / WATT
DISTRIBUTIONS: I,II,III,IV,V
AND 90-DEGREE BEAM ANGLE
CCT: 3000K AND 4000K
CRI:80
IP66
CSA

OPTIONS

HSS:
HOUSE SIDE SHIELD (INTERNAL)

RCD-DOF:
INTERNAL DIMONOFF LIGHT
CONTROL SYSTEM C/W ANTENNA
(SOFTWARE NOT INCLUDED)

MOD-DOF:
INTERNAL DIMONOFF RGBW LIGHT
CONTROL SYSTEM C/W ANTENNA

TRP7:
7 PINS TWIST LOCK PHOTOCELL
RECEPTACLE (ANSI C136.41)
C/W SHORTING CAP

Configurations

CURVED
AU-C6TC
AU-C8TC



STRAIGHT
AU-C6TS
AU-C8TS



CLASSIC
AU-C6
AU-C8



STANDARD POLE

**AVAILABLE WITH THESE
CONFIGURATIONS:**

- Ø4" AU-C6TC
AU-C6TS
- Ø6" AU-C8TC
AU-C8TS
AU-C6
- Ø8" AU-C8

RAIL POLE

**AVAILABLE WITH THESE
CONFIGURATIONS:**

- Ø6" AU-C8TC
AU-C8TS
AU-C6
- Ø8" AU-C8

Ø 6"

Lens diameter

12"

24"

36"


48"

48"

36"

24"

Ø 8"

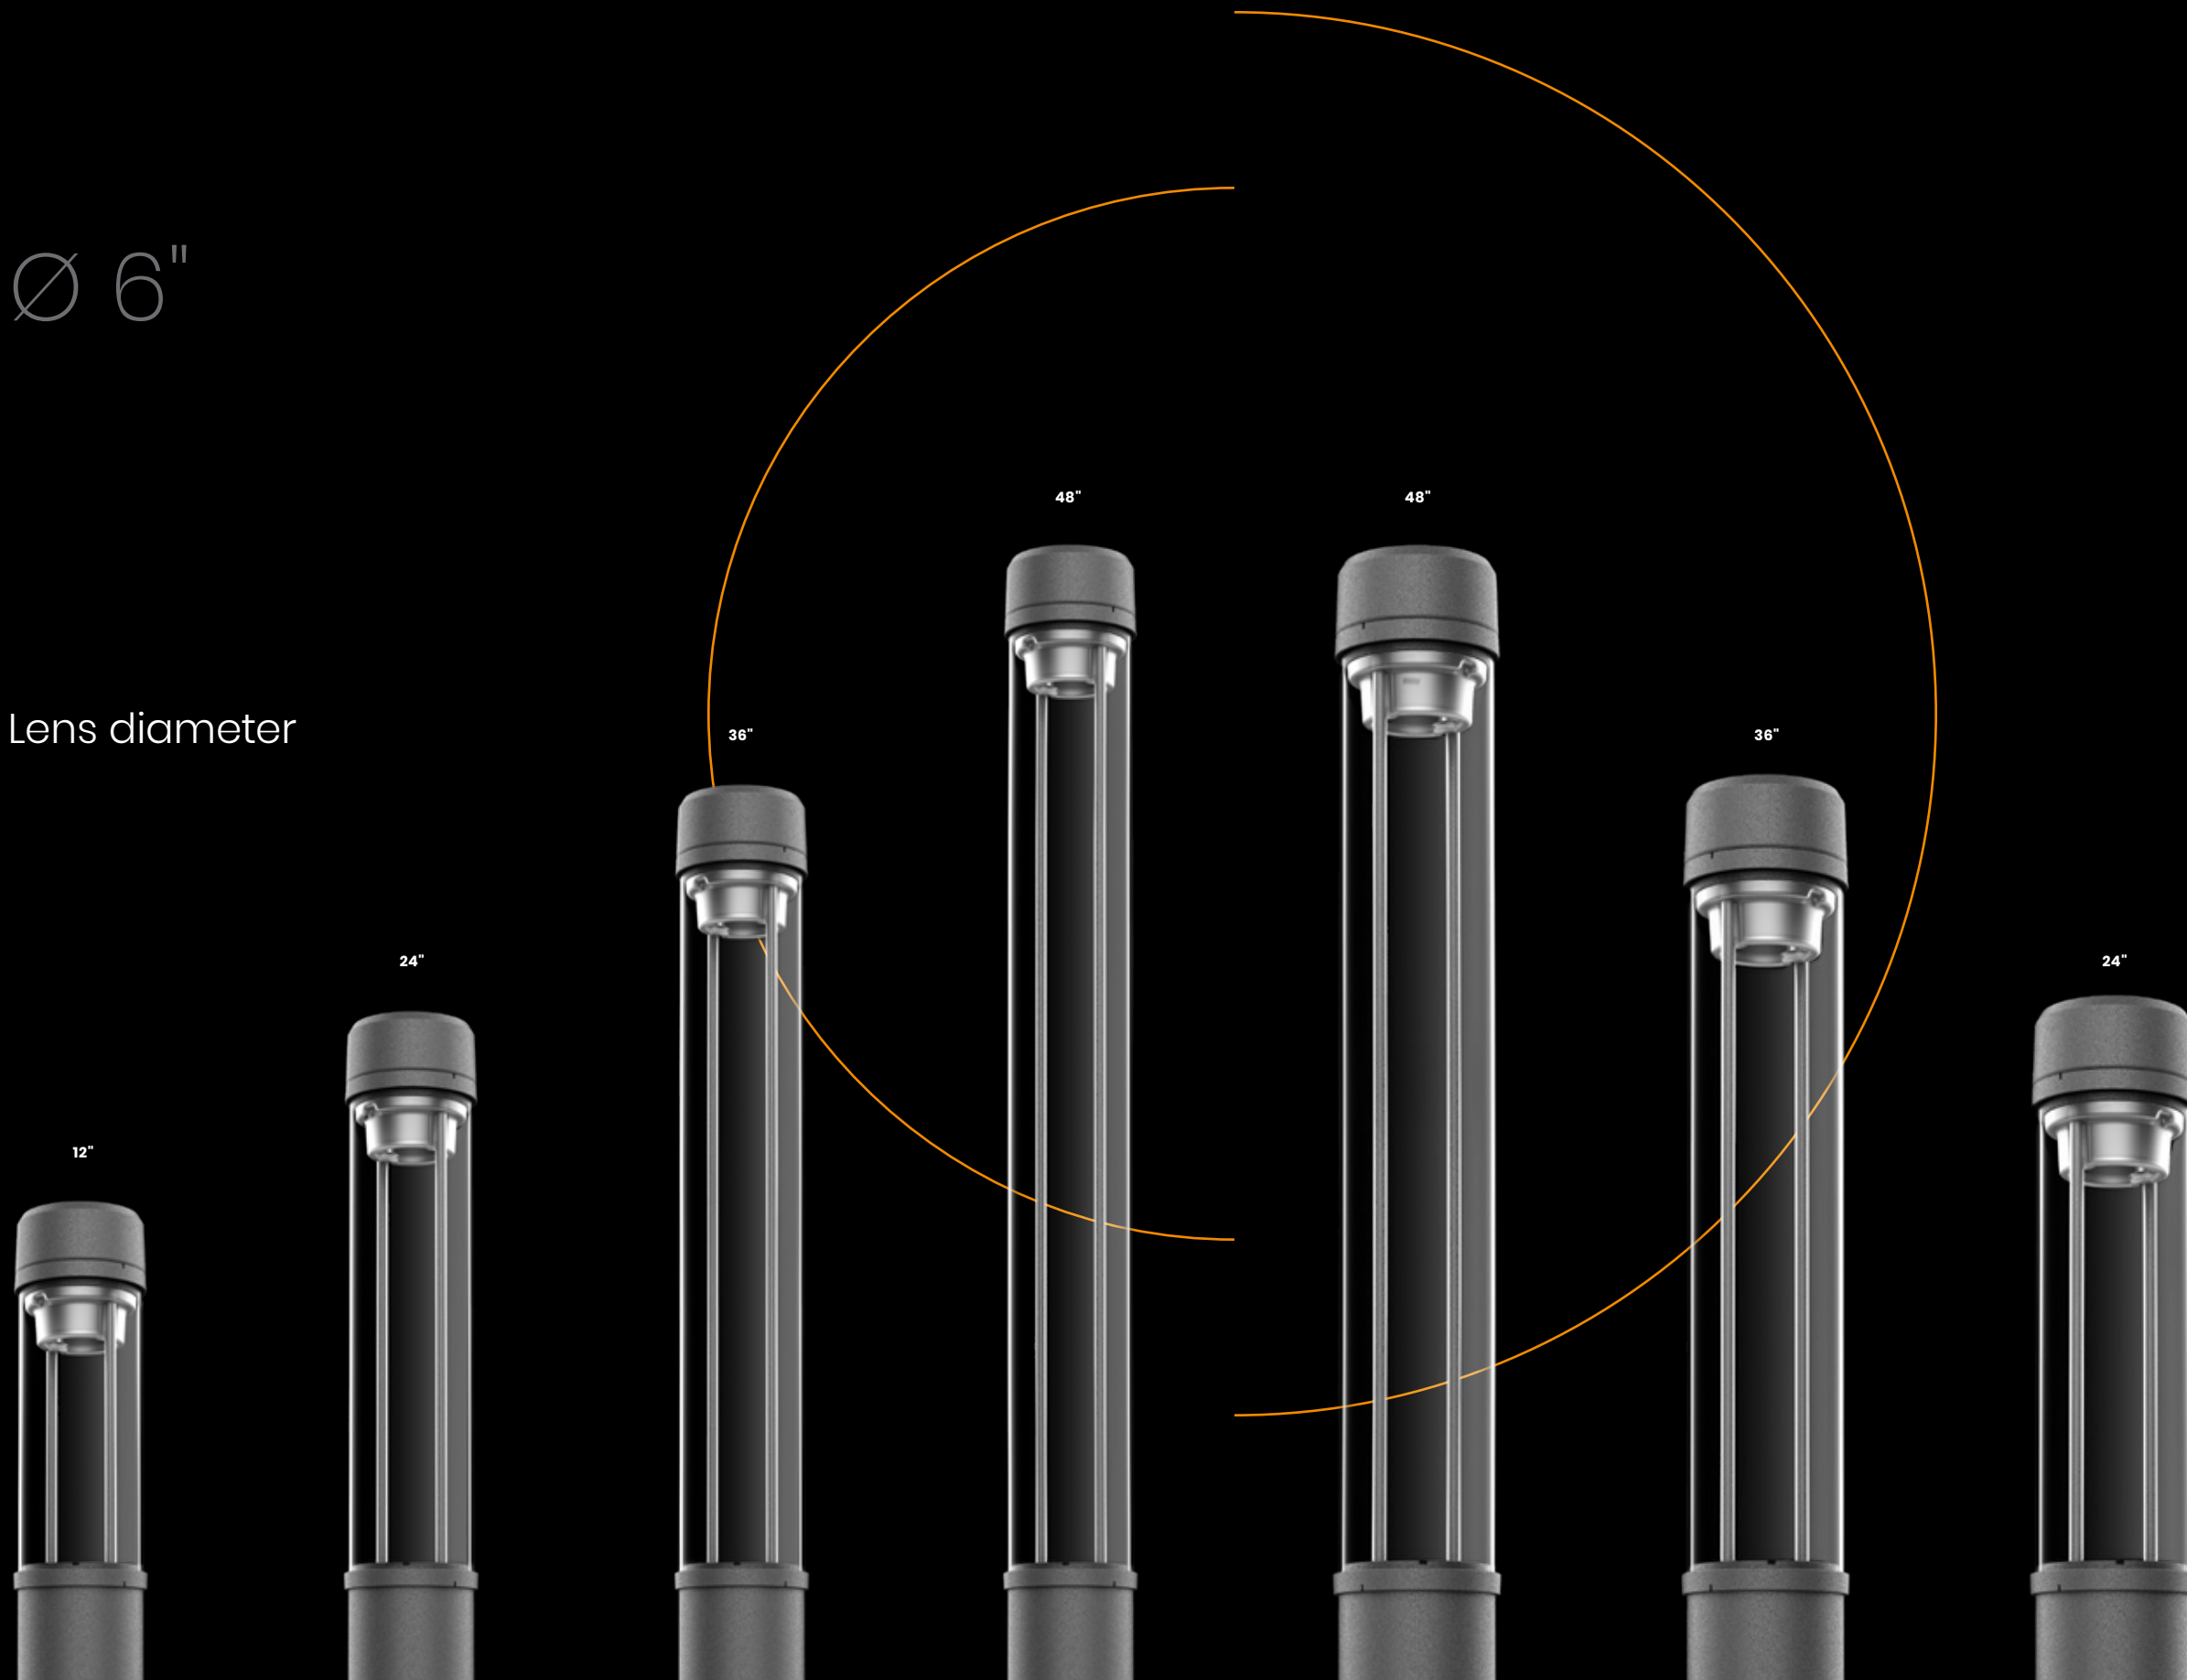

RGBW

UP TO 3000 LUMENS *
UP TO 100 LUMENS / WATT *
DISTRIBUTIONS: V
3000K and 4000K
CRI: 80
IP66
CSA

* Performance based on white spectrum only; CCT 3000K and 4000K



Multiple possibilities.
Limitless creativity.

Bases



WRAP-AROUND BASE COVER



BURIED BASE

Bollards

UP TO 6 000 LUMENS
UP TO 110 LUMENS / WATT
DISTRIBUTIONS: I,II,III,IV,V
AND 90-DEGREE BEAM ANGLE
CCT: 3000K AND 4000K
CRI: 80
IP66
CSA

OPTIONS

RCD-DOF:
INTERNAL DIMONOFF LIGHT
CONTROL SYSTEM C/W ANTENNA
(SOFTWARE NOT INCLUDED)

MOD-DOF:
INTERNAL DIMONOFF RGBW LIGHT
CONTROL SYSTEM C/W ANTENNA

Ø 6" HEIGHTS
40"

Ø 8" HEIGHTS
42"

AU-B6
AU-B8

AU-B6-WB
AU-B8-WB

AU-BLF6
AU-BLF8

AU-BLF6-WB
AU-BLF8-WB

