


AURA

We're redefining
lighting quality.

DESIGNED, ENGINEERED
AND MANUFACTURED
IN NORTH AMERICA.



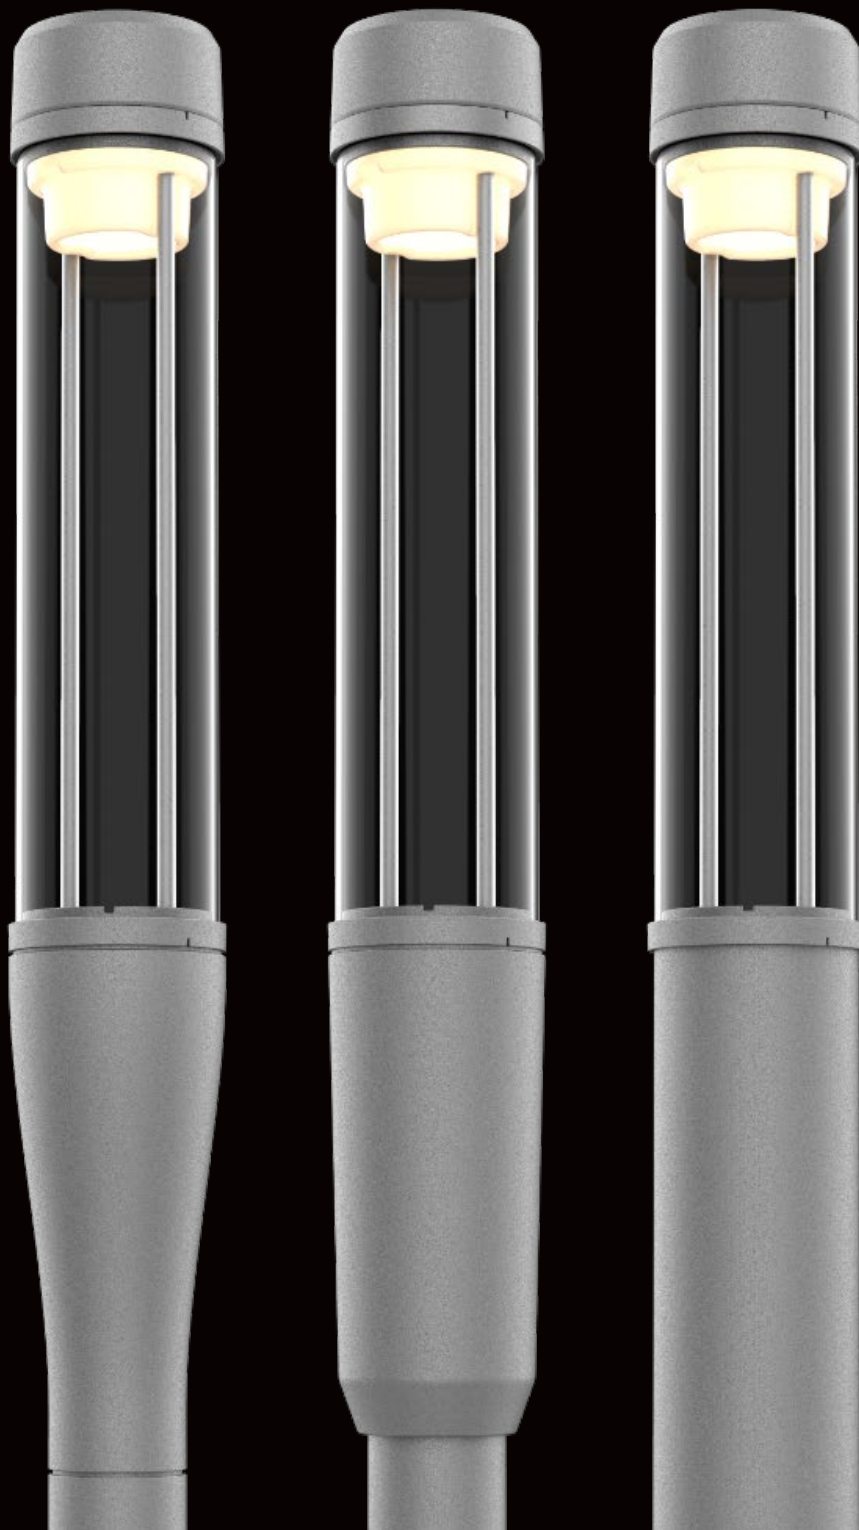

AURA: Outdoor LED lighting that masters each moment.

AURA is a new generation of outdoor lighting solutions for cities that defies convention. Imagine being able to take advantage of the design flexibility, energy savings and lifespan of LED lights—all while offering the warm ambience of traditional lighting. That is the breakthrough with AURA. Never compromise on look—or performance.

Striking the perfect balance between performance and visual comfort.

AURA elegant lighting solutions house an ingenious LED light engine that reduces excessive glare by hiding the LED's point-sources of light. Your lights will never be too intrusive. They'll simply light up people's lives in more pleasant and immersive way.

UP TO 6 600 LUMENS

UP TO 110 LUMENS/WATT

IES DISTRIBUTION TYPE I, II, III, IV, V AND 90-DEGREE BEAM ANGLE

CCT: 3000K and 4000K

CRI: 80

Discover AURA

- **Highly efficient optical system:** IES distribution type I, II, III, IV, V and 90-degree beam angle
- **Communications-ready:** AURA's luminance and LED color can be configured remotely using an embedded antenna
- **Sturdy construction:** Made with high quality aluminum grade that withstands any environmental and weather conditions
- Made out of **high quality aluminum grade** and salt spray resistant paint finish

Available solutions

Columns

Light engine

UP TO 6 600 LUMENS
UP TO 110 LUMENS/WATT
IES DISTRIBUTION TYPE 1,2,3,4,5
AND 90-DEGREE BEAM ANGLE
CCT: 3000K and 4000K
CRI: 80


Configurations



Curved	Straight	Classic
AU-C6TC	AU-C6TS	AU-C6
AU-C8TC	AU-C8TS	AU-C8

Rail pole


Available with these configurations:

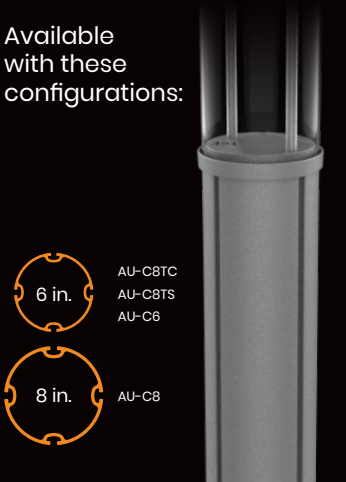

6 in.	AU-C6TC AU-C6TS AU-C6
8 in.	AU-C8


Standard pole

Available with these configurations:

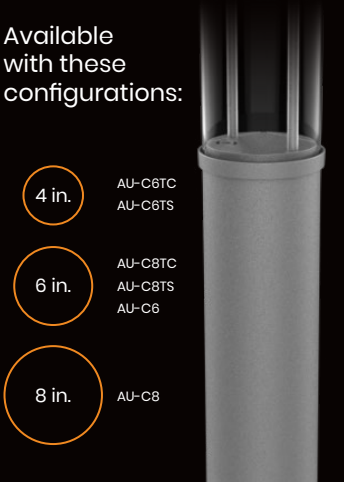


4 in.	AU-C6TC AU-C6TS
6 in.	AU-C6TC AU-C6TS AU-C6
8 in.	AU-C8

Lens diameter

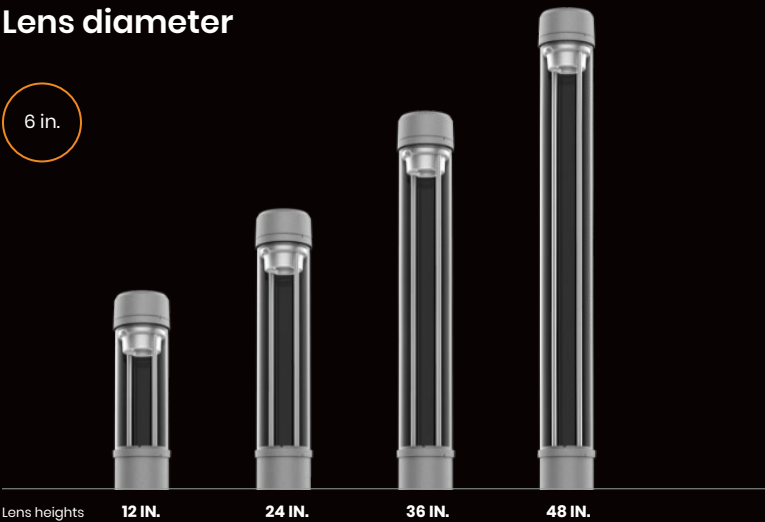

Lens heights 12 IN. 24 IN. 36 IN. 48 IN.


Lens diameter

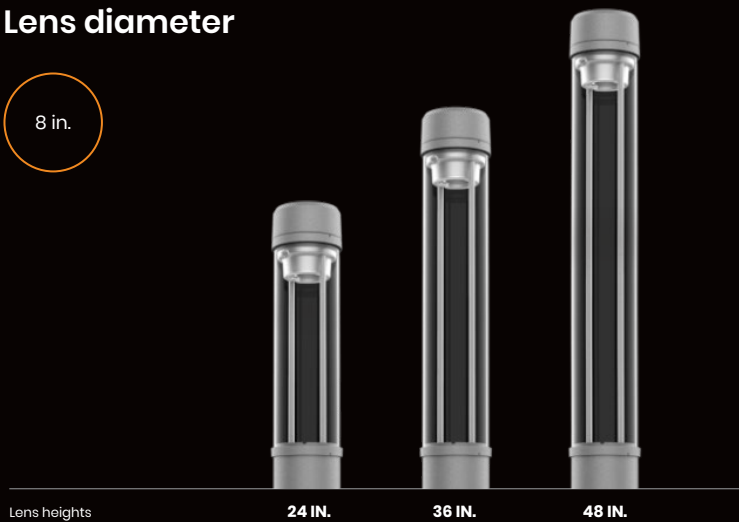

Lens heights 24 IN. 36 IN. 48 IN.

Available solutions

Bases

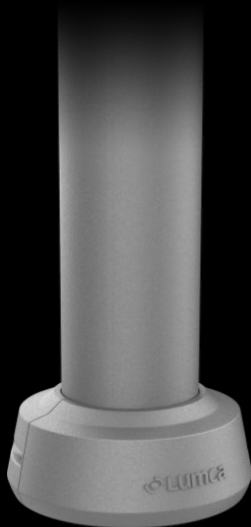


WRAP AROUND BASE COVER
AVAILABLE WITH 4", 6", 8" POLE Ø



BURIED BASE
AVAILABLE WITH 4", 6", 8" POLE Ø

Embedded lighting control

Discreet antenna

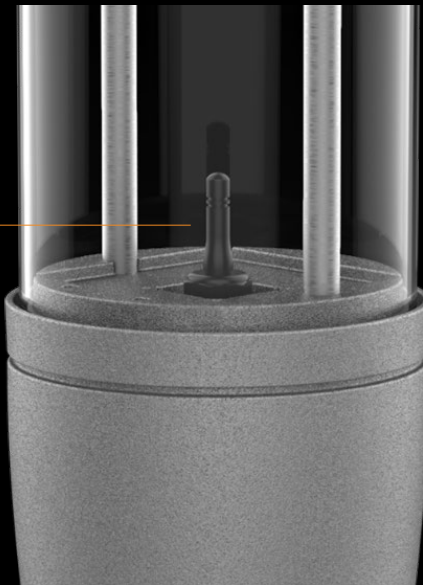

RGBW



* Performance based on white spectrum only CCT 3000K and 4000K

Available solutions

Bollards

Light engine

UP TO 6 000 LUMENS

UP TO 100 LUMENS/WATT

IES DISTRIBUTION TYPE I, II, III, IV, V

AND 90-DEGREE BEAM ANGLE

CCT: 3000K and 4000K

CRI: 80

Diameters

Heights

6 in.

40 in.

8 in.

42 in.

AU-B6
AU-B8

AU-B6-WB
AU-B8-WB

AU-BLF6
AU-BLF8

AU-BLF6-WB
AU-BLF8-WB



Multiple possibilities. Limitless creativity.



**WARM UP TO A NEW LEVEL
OF LIGHTING PERFORMANCE.**

AURA electrifies environments and emotions.

