



COLOR CHART

-Polyester powder coating.

-One coat **plaforisation** system.

-Finish as a minimum thickness of 100 microns, is rated 5000 hours salt spray tested per **ASTM B117** and meets the **ASTM D2247** regulation related to the resistance of the finishes exposed to a 100% relative humidity.

-All Lumca standard colours have a textured finish (except AG, SB, SG & SD have a smooth finish).

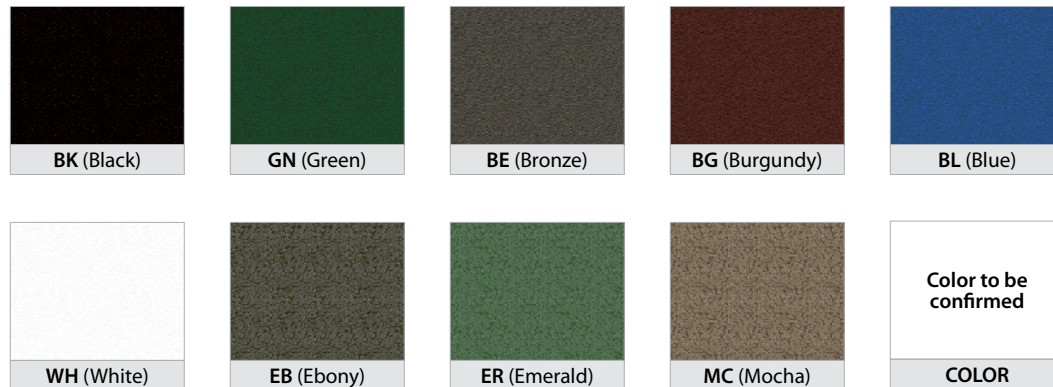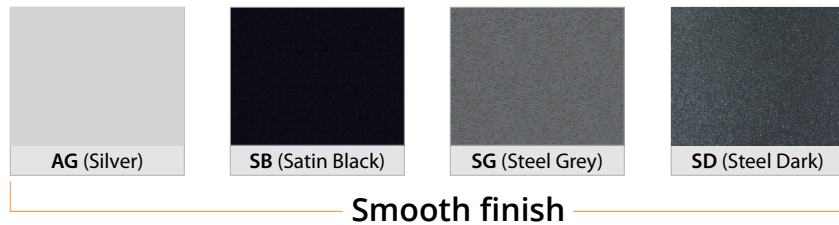

RAL and custom coloursConsult factory

Lumca reserves the right to modify the elements on this technical data sheet without prior notice.



T : 877.650.1693 | www.lumca.com