AURA


We're redefining lighting quality.









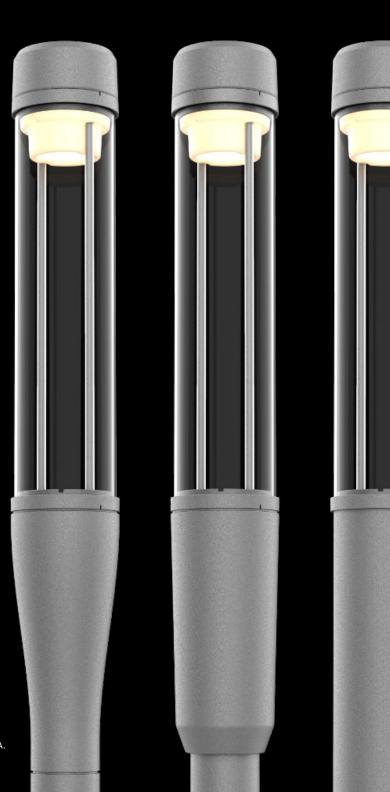



AURA: Outdoor LED lighting that masters each moment.

AURA is a new generation of outdoor lighting solutions for cities that defies convention. Imagine being able to take advantage of the design flexibility, energy savings and lifespan of LED lights—all while offering the warm ambience of traditional lighting. That is the breakthrough with AURA. Never compromise on look—or performance.

Striking the perfect balance between performance and visual comfort.

AURA elegant lighting solutions house an ingenious LED light engine that reduces excessive glare by hiding the LED's point-sources of light. Your lights will never be too intrusive. They'll simply light up people's lives in more pleasant and immersive way.

UP TO 10 000 LUMENS

UP TO 110 LUMENS/WATT

IES DISTRIBUTION TYPE 1,2,3,4,5 AND 90-DEGREE BEAM ANGLE

CCT: 3000K and 4000K

CRI: 80

Discover AURA


- **Highly efficient optical system**: IES distribution type 1, 2, 3, 4, 5 and 90-degree beam angle
- **Communications-ready**: AURA's luminance and LED color can be configured remotely using an embedded antenna
- **Sturdy construction**: Made with high quality aluminum grade that withstands any environmental and weather conditions
- Made out of high quality aluminum grade and salt spray resistant paint finish

Available solutions

Columns

Light engine

UP TO 10 000 LUMENS
UP TO 110 LUMENS/WATT
IES DISTRIBUTION TYPE 1,2,3,4,5
AND 90-DEGREE BEAM ANGLE
CCT: 3000K and 4000K
CRI: 80

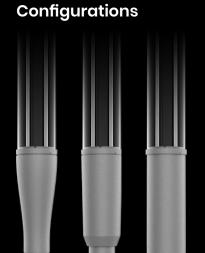


Curved
AU-C6TC
AU-C8TC

Straight AU-C6TS AU-C8TS


Classic AU-C6 AU-C8


Rail pole

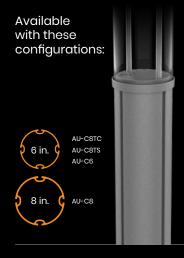

Standard pole



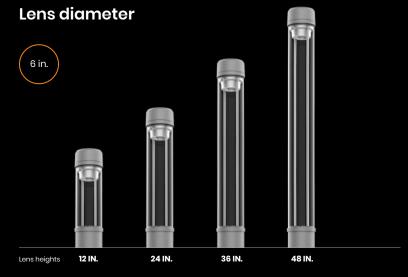

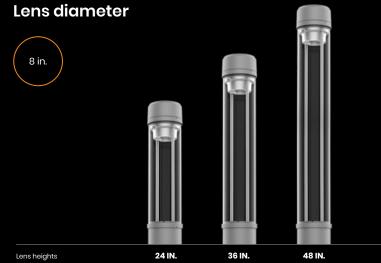

Available solutions

Bases



WRAP AROUND BASE COVER AVAILABLE WITH 4", 6", 8" POLE Ø



BURIED BASE AVAILABLE WITH 4", 6", 8" POLE Ø

Embedded lighting control

Discreet antenna



RGBW

Light engine

UP TO 3000 LUMENS *
UP TO 100 LUMENS/WATT *
DISTRIBUTION TYPE 5
3000K and 4000K
CRI: 80



 $^{^{}st}$ Performance based on white spectrum only CCT 3000K and 4000K

Available solutions

Bollards

Light engine

UP TO 5 000 LUMENS
UP TO 110 LUMENS/WATT
IES DISTRIBUTION TYPE 1,2,3,4,5
AND 90-DEGREE BEAM ANGLE
CCT: 3000K and 4000K
CRI: 80

Diameters Heights

6 in. 40 in.

8 in. **42 in.**



Multiple possibilities. Limitless creativity.



WARM UP TO A NEW LEVEL OF LIGHTING PERFORMANCE.

